




Gokin


Moduł GBC z podwójną szybą
GK-1-78HGBD

655-685W

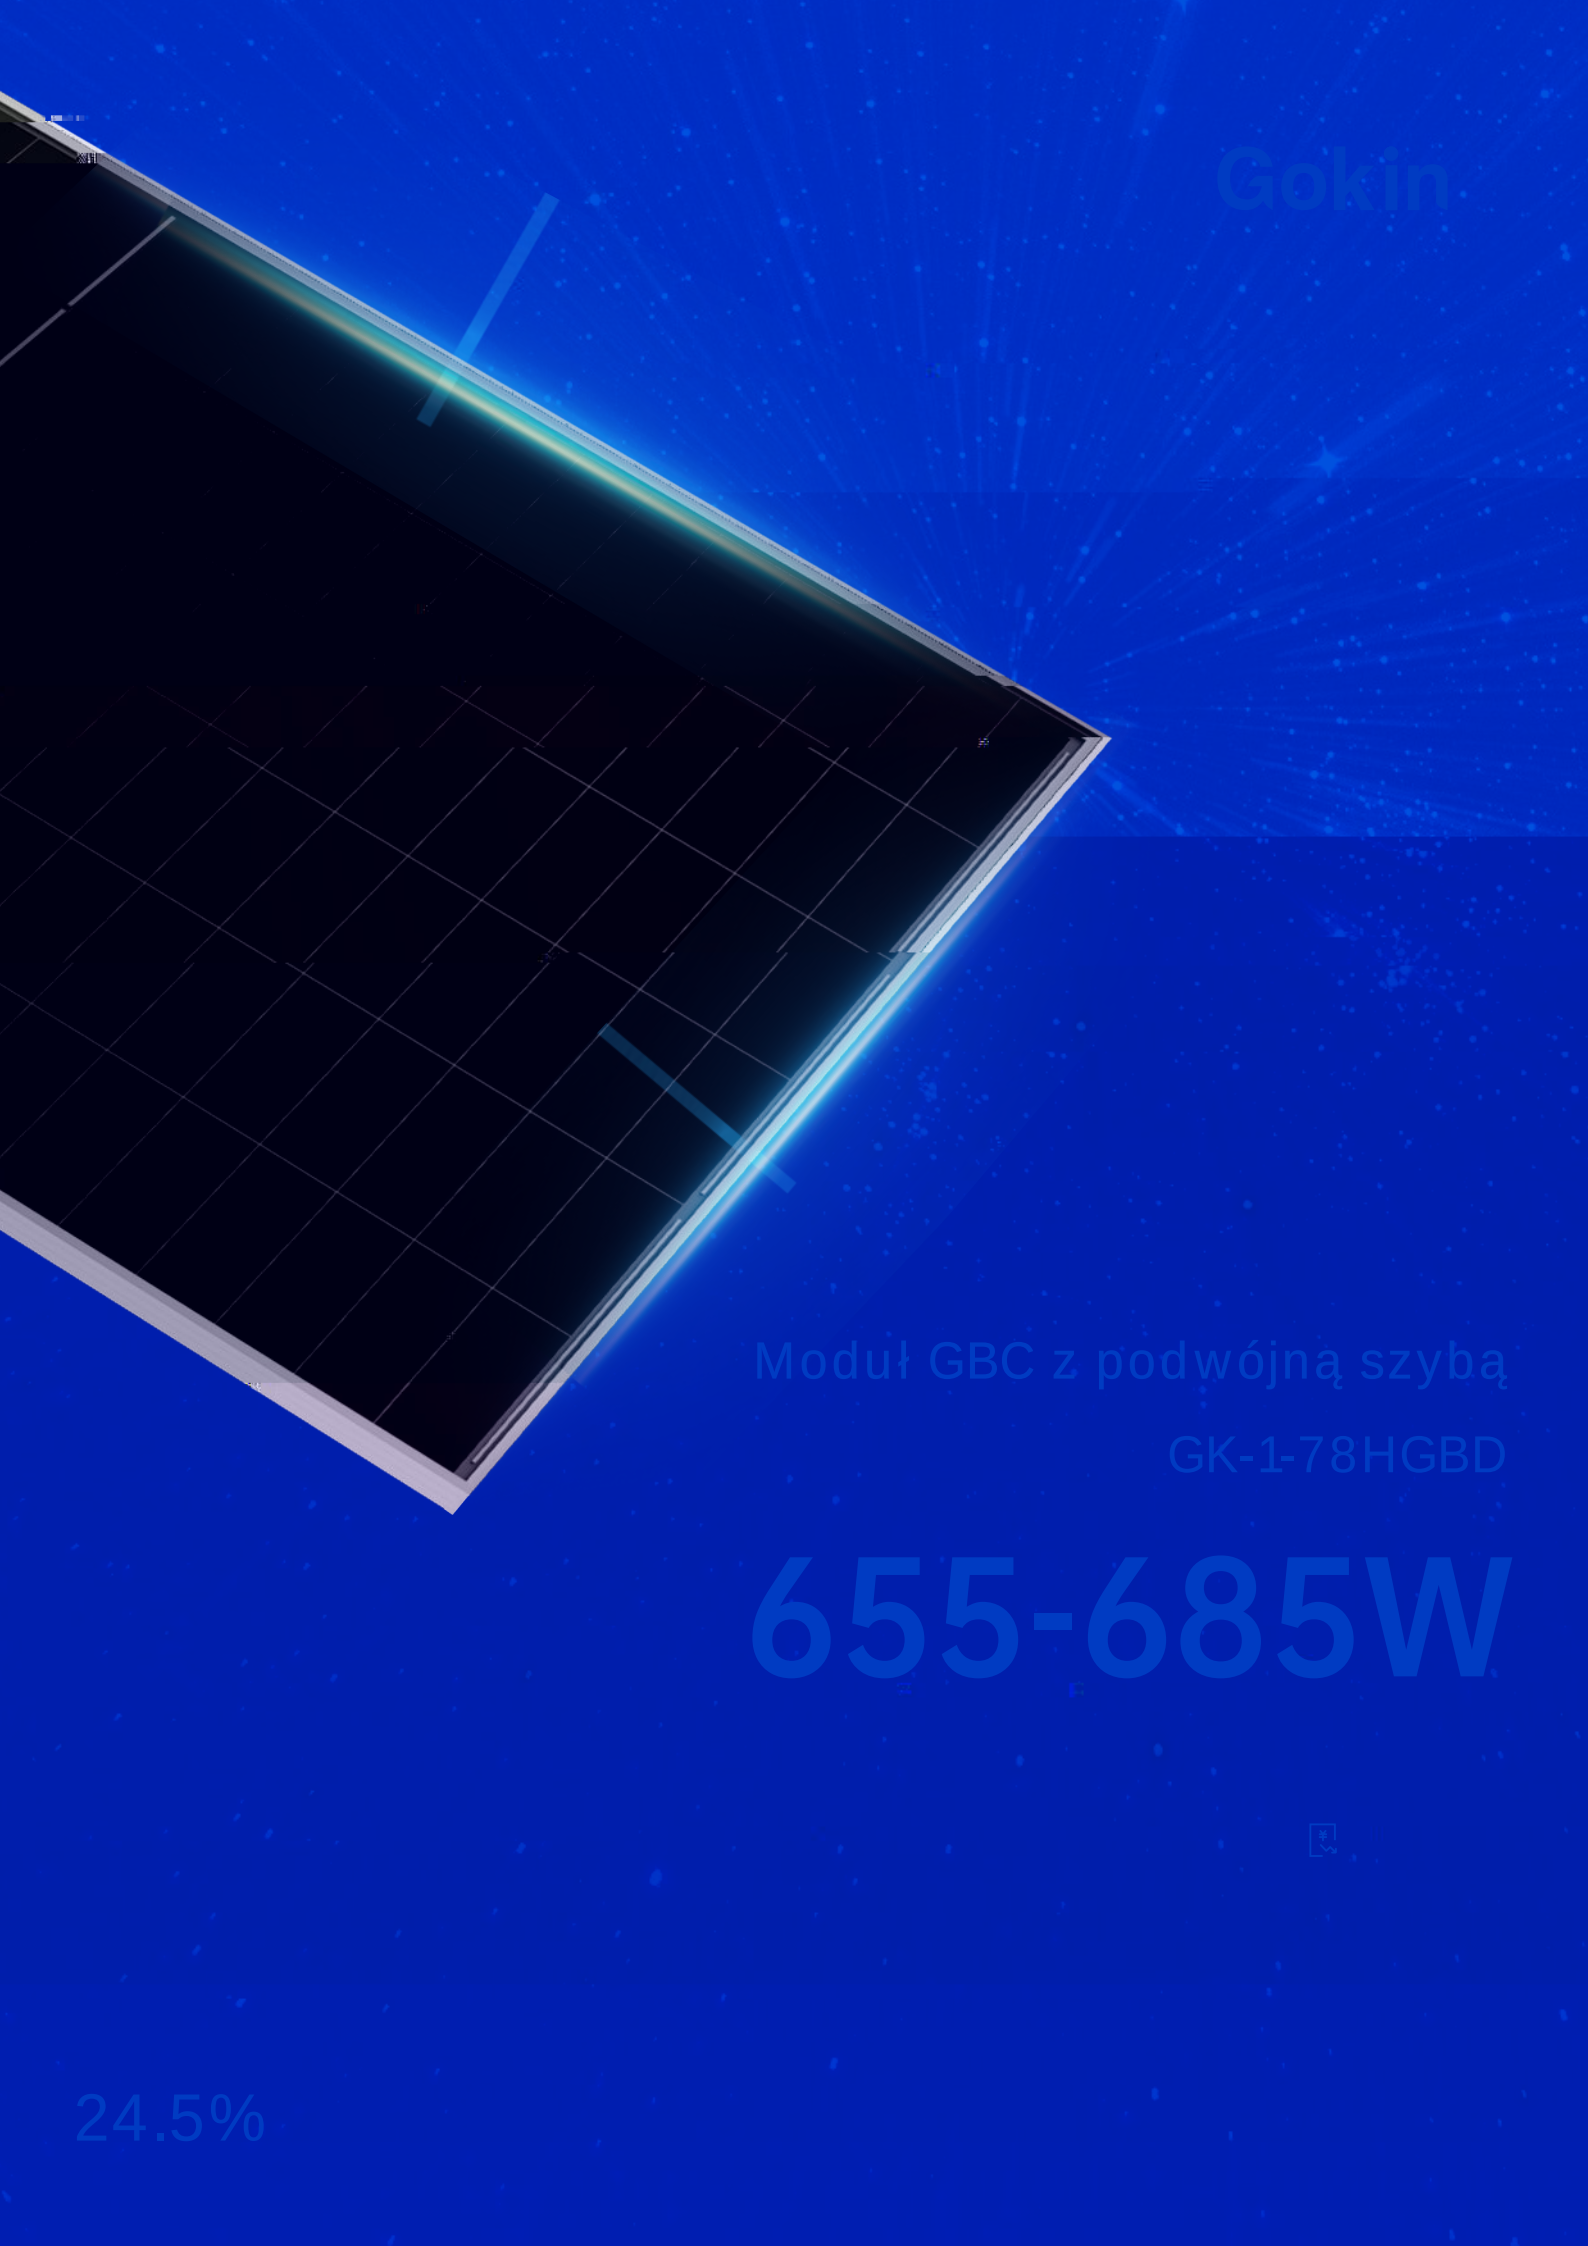

24.5%

Rysunki techniczne

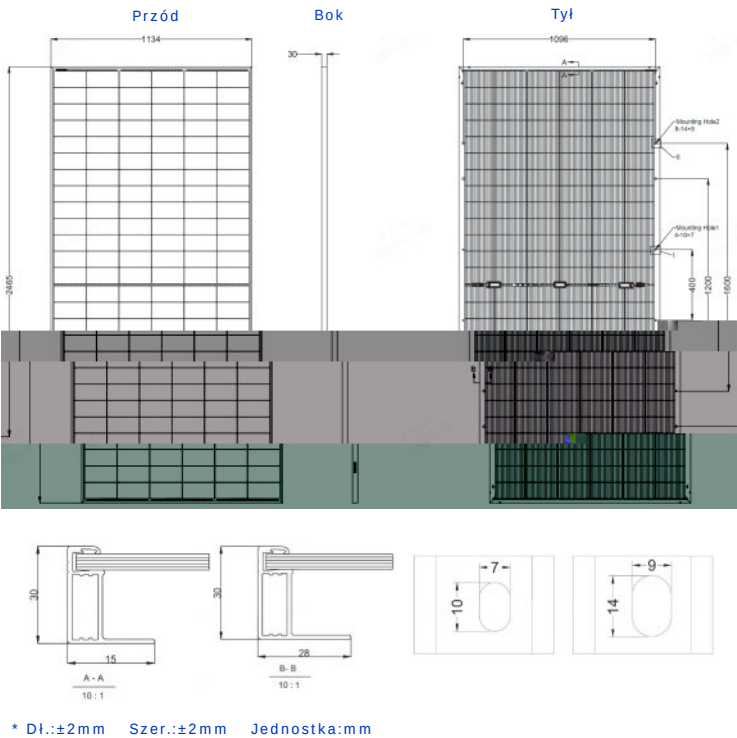

78HGBD-660M GK-1-78HGBD-665M GK-1-78HGBD-670M GK-1-78HGBD-675M GK-1-78HGBD-680M GK-1-78HGBD-685M

60	497	665	501	670	505	675	508	680	512	685	516
80	55.53	58.86	55.58	58.92	55.64	58.98	55.70	59.04	55.75	59.10	55.81
67	45.97	48.73	46.02	48.79	46.08	48.85	46.14	48.91	46.19	48.97	46.20
28	11.55	14.35	11.61	14.42	11.66	14.49	11.72	14.56	11.78	14.63	11.84
57	10.82	13.65	10.89	13.74	10.96	13.82	11.03	13.91	11.10	13.99	11.17
	23.6	23.8		24.0		24.1		24.3		24.5	

ła ogniwa 25 , AM=1,5
ra otoczenia 20 AM=1,5, prędkość wiatru 1M/S

