

Gokin

470-500W

Superior Temperature coefficient



A

D

Module Efficiency up to 18.5%



Product Warranty



5 Year Power Warranty



TUV certified



- Operating Temperature-40°C ~ +85°C
 - Power Tolerance0~+3%
 - Junction BoxIP68
 - NOCT45±2°C
- Maximum Series Fuse Rating25A
 - Maximum System Voltage1500V(IEC)

108 6×18

TüV 1×4mm2

24.8kg (54.67lbs)


1800×1134×30mm

MC4 Compatible/MC4-Evo2

37 pcs per pallet
222 pcs per 20' GP 888 pcs per 40' HC

Class II

IEC Class C

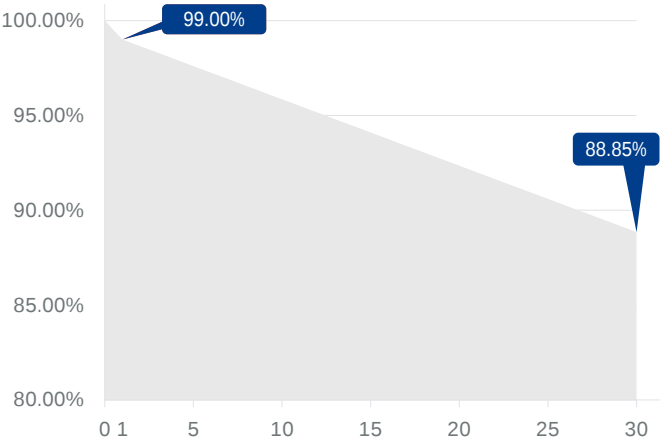

Temperature Coefficient of Isc	+0.05%/
Temperature Coefficient of Voc	-0.22%/
Temperature Coefficient of Pmax	-0.26%/
	5400Pa
	2400Pa
25 mm diameter hail at 23 m/s	