


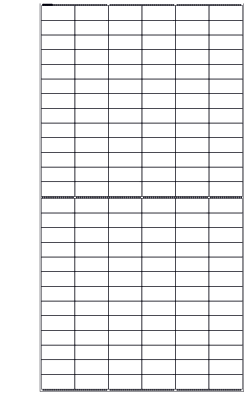




	GBC
No. of cells	
Glass	
Frame	Anodized aluminum
	or Customized Length
Weight	
Connector	
Packaging	
Protection Class	
Fire Rating	



B-B
10:1

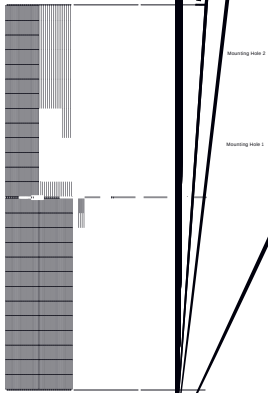

Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
	760	576	765	580	770	584	775	588	780	592
	58.52	55.49	58.62	55.58	58.72	55.68	58.82	55.77	58.92	55.87
	48.57	46.17	48.67	46.27	48.77	46.36	48.87	46.46	48.97	46.55
	16.50	13.28	16.57	13.34	16.64	13.40	16.71	13.46	16.78	13.53
	15.65	12.48	15.72	12.54	15.79	12.60	15.86	12.65	15.93	12.71

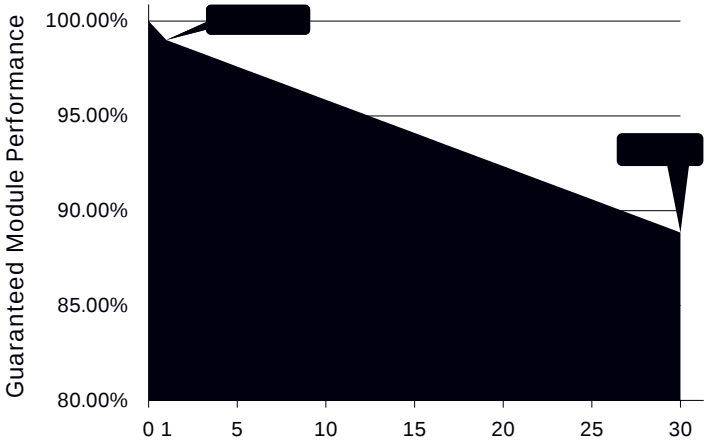

-
-
-
-
-
-